

Sticky bars and balances lead to alloy wheels



- Directions for the use of counterweights in lead. These counterweights NOT comply with the European directive ELV N ° 2000/53 / EC and therefore should not be used in respect of this EU Directive, vehicles of class M1 and N1.
- The thickness includes the adhesive film.
- Adhesive film of high quality.
- 60 grams total, 4 pieces of 5 gr. + 4 pieces of 10 gr.
- Lead natural color.
- Easily formed and separated.

Code	Desc gr.	Grams	Thickness mm	Width mm	Utilization
3670000300	60 SLIM	4x5 + 4x10	3,8	18	Suitable for motorbikes and scooters



- Directions for the use of counterweights in lead. These counterweights NOT comply with the European directive ELV N ° 2000/53 / EC and therefore should not be used in respect of this EU Directive, vehicles of class M1 and N1.
- The thickness includes the adhesive film
- Adhesive film of high quality SPEEDLINER to detach without leaving sticky residue
- 40 grams total, 8 pieces to 5 grams.
- Optimal dimensions for wheels with narrow channel
- Easily formed and separable.

Code	Desc gr.	Grams	Thickness mm	Width mm	Color	Utilization
3670000390	40 SLIM-P	8x5 gr.	4,8	10	lead natural	Suitable for motorcycles
3670000395	40 SLIM-N	8x5 gr.	4,8	10	Black	Suitable for motorcycles



- Directions for the use of counterweights in lead. These counterweights NOT comply with the European directive ELV N ° 2000/53 / EC and therefore should not be used in respect of this EU Directive, vehicles of class M1 and N1.
- The thickness includes the adhesive film.
- Adhesive film of high quality.
- 60 grams total, 4 pieces of 5 gr. + 4 pieces of 10 gr.
- Lead natural color.
- Easily formed and separated.

Code	Desc gr.	Grams	Thickness mm	Width mm	Utilization
3670000100	60 standard	4x5 + 4x10	5	15	Moto-Caravan-commercial vehicles



- Directions for the use of counterweights in lead. These counterweights NOT comply with the European directive ELV N ° 2000/53 / EC and therefore should not be used in respect of this EU Directive, vehicles of class M1 and N1.
- The thickness includes the adhesive film.
- Adhesive film of high quality.
- 100 grams total, 5 pieces from 20 gr.
- Lead natural color.
- Easily formed and separated.

Code	Desc gr.	Grams	Thickness mm	Width mm	Utilization
3670000700	100	5x20 gr.	7	15	Truck



- Directions for the use of counterweights in lead. These counterweights NOT comply with the European directive ELV N ° 2000/53 / EC and therefore should not be used in respect of this EU Directive, vehicles of class M1 and N1.
- The thickness includes the adhesive film.
- Adhesive film of high quality.
- Silver, due to the powder coating epoxy.
- Easily formed.
- Our product is mounted in the first plant by Renault-Volvo-Mercedes-Benz Evobus.

Code	Desc gr.	Grams	Utilization
367PL00050	50	50 gr.	Truck
367PL00100	75	75 gr.	Truck
367PL00200	100	100 gr.	Truck
367PL00300	150	150 gr.	Truck

Counterweights spring in lead for truck for tubeless tires from 22.5 in and above



- Clips particularly adaptable for steel wheels with thin edge.
- Silver, due to the powder coating epoxy.
- Our product is mounted in the first plant by Mercedes Benz.

Code	Desc gr.	Grams	Utilization
364TR00050	50	50 gr.	Truck
364TR00100	100	100 gr.	Truck
364TR00200	150	150 gr.	Truck
364TR00300	200	200 gr.	Truck
364TR00400	250	250 gr.	Truck
364TR00500	300	300 gr.	Truck

Pesi per autocarro tubeless



- Contrappesi in piombo con molla fissa in acciaio.
- Per autocarri con cerchi tubeless.

Code	Desc gr.
364CA00100	50
364CA00200	75
364CA00300	100
364CA00400	150
364CA00500	200
364CA00600	250
364CA00700	300


Sticky bars and balances iron for alloy wheels



- The thickness includes the adhesive film.
- Adhesive film of high quality.
- 60 grams total.
- Optimal dimensions for wheels with narrow channel.
- Easily formed and separated.

Code	Desc.	Grams	Thickness mm	Width mm	Color	Utilization
3670000600	60 SLIM-Z	12x5 gr.	3,8	19	Galvanized	Auto -Caravan - V.I.
3670000604	60 SLIM-N	12x5 gr.	3,8	19	Black	Auto -Caravan - V.I.
3670000602	60 SLIM-R	12x5 gr.	3,8	19	Silver powder	Auto -Caravan - V.I.
3670000606	60F SLIM-R	4x5 gr+4x10 gr	3,8	19	Silver powder	Auto -Caravan - V.I.
3670000610	61F SLIM-Z	4x5 gr+4x10 gr	3,8	19	Galvanized	Auto -Caravan - V.I.

Adhesive weights in roller iron for alloy wheels

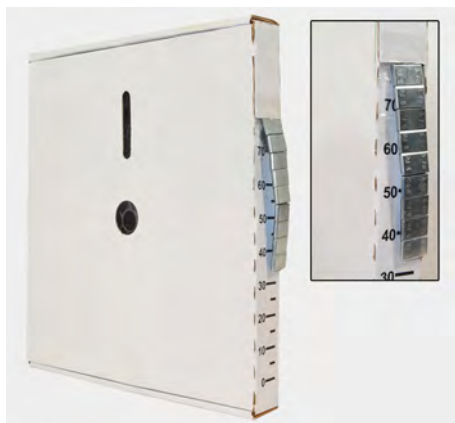

- The thickness includes the adhesive film.
- Adhesive film of high quality.
- 6 kg. Compounds of 1200 from 5 gr.
- Color galvanized.
- Easily formed and separated.

Code	Desc.	Grams	Thickness mm	Width mm	Utilization
3670000800	397 RU	1200x5 gr.	3,8	19	Car-bike

Roller door for 397RU



- Suitable for roller weights from 5 kg.
- Multifunctional, either on the wall or on the workbench.
- Not suitable for 6 kg rollers

Code	Desc.
3670000810	2800

Universal balancing spring fixed in zinc for steel wheels



Code	Desc gr.	Grams	Utilization
364EC00050	5	5 gr.	Auto-Commercial Vehicles
364EC00100	10	10 gr.	Auto-Commercial Vehicles
364EC00150	15	15 gr.	Auto-Commercial Vehicles
364EC00200	20	20 gr.	Auto-Commercial Vehicles
364EC00250	25	25 gr.	Auto-Commercial Vehicles
364EC00300	30	30 gr.	Auto-Commercial Vehicles
364EC00350	35	35 gr.	Auto-Commercial Vehicles
364EC00400	40	40 gr.	Auto-Commercial Vehicles
364EC00450	45	45 gr.	Auto-Commercial Vehicles
364EC00500	50	50 gr.	Auto-Commercial Vehicles
364EC00550	55	55 gr.	Auto-Commercial Vehicles
364EC00600	60	60 gr.	Auto-Commercial Vehicles

- Zinc coated with epoxy powder in silver.
- The special clip attachment of the counterweight enables universal use for almost all circles in iron and steel also of French cars and light trucks.

Universal balancing spring fixed in zinc for alloy wheels



Code	Desc gr.	Grams	Utilization
366EC00050	5	5 gr.	Auto-Commercial Vehicles
366EC00100	10	10 gr.	Auto-Commercial Vehicles
366EC00150	15	15 gr.	Auto-Commercial Vehicles
366EC00200	20	20 gr.	Auto-Commercial Vehicles
366EC00250	25	25 gr.	Auto-Commercial Vehicles
366EC00300	30	30 gr.	Auto-Commercial Vehicles
366EC00350	35	35 gr.	Auto-Commercial Vehicles
366EC00400	40	40 gr.	Auto-Commercial Vehicles
366EC00450	45	45 gr.	Auto-Commercial Vehicles
366EC00500	50	50 gr.	Auto-Commercial Vehicles
366EC00550	55	55 gr.	Auto-Commercial Vehicles
366EC00600	60	60 gr.	Auto-Commercial Vehicles

- Zinc coated with epoxy powder in silver.
- The special clip attachment of the counterweight enables universal use for almost all alloys and aluminum.

Universal balancing spring fixed in zinc for steel wheels type French



- Zinc coated with epoxy powder in silver.
- The special clip attachment of the counterweight enables universal use for steel wheels French cars.

Code	Desc.	Grams	Utilization
365EC00050	5	5 gr.	Auto-Commercial Vehicles
365EC00100	10	10 gr.	Auto-Commercial Vehicles
365EC00150	15	15 gr.	Auto-Commercial Vehicles
365EC00200	20	20 gr.	Auto-Commercial Vehicles
365EC00250	25	25 gr.	Auto-Commercial Vehicles
365EC00300	30	30 gr.	Auto-Commercial Vehicles
365EC00350	35	35 gr.	Auto-Commercial Vehicles
365EC00400	40	40 gr.	Auto-Commercial Vehicles
365EC00450	45	45 gr.	Auto-Commercial Vehicles
365EC00500	50	50 gr.	Auto-Commercial Vehicles
365EC00550	55	55 gr.	Auto-Commercial Vehicles
365EC00600	60	60 gr.	Auto-Commercial Vehicles

Universal balancing adhesive zinc for alloy wheels



- Zinc coated with epoxy powder in silver.
- The special invoice of construction grooved easy to service of all types of curvatures of the circle.
- Mounted in first plant from Porsche-VW-Audi-Volvo-Ford-Opel.
- Thickness of 3.8 mm tape.
- Width 19 mm.

Code	Desc.	Grams	Number Gorges <i>horizontal</i>	Utilization
367ZI00050	5	5 gr.	0	Auto-Moto-commercial vehicles
367ZI00100	10	10 gr.	1	Auto-Moto-commercial vehicles
367ZI00150	15	15 gr.	1	Auto-Moto-commercial vehicles
367ZI00200	20	20 gr.	1	Auto-Moto-commercial vehicles
367ZI00250	25	25 gr.	1	Auto-Moto-commercial vehicles
367ZI00300	30	30 gr.	2	Auto-Moto-commercial vehicles
367ZI00350	35	35 gr.	2	Auto-Moto-commercial vehicles
367ZI00400	40	40 gr.	3	Auto-Moto-commercial vehicles
367ZI00450	45	45 gr.	3	Auto-Moto-commercial vehicles
367ZI00500	50	50 gr.	3	Auto-Moto-commercial vehicles
367ZI00550	55	55 gr.	4	Auto-Moto-commercial vehicles
367ZI00600	60	60 gr.	4	Auto-Moto-commercial vehicles

Powder balancing Meccanocar 505



- By placing a bag inside the tire, due to centrifugal force, the powder is distributed evenly on the walls, and where there is an imbalance, is deposited and goes to compensate. Compensation is perennial, dust adapts to changes of temperature, road conditions and driving style.
- DUST 505 is MECCANOCAR DIFFERENT, because it is a source of study and research with Hofmann Technology. In fact it is made from red grains larger, which are concentrated in the center of the tire and compensate the static unbalance and granules smaller blue which move outward and reduce the dynamic imbalance. Composition of the granules: is a natural mineral material to special coating.
- Each envelope must be paid entirely inside the tire, and is contained within a dispenser
- Cap and internal mechanism integrated in the envelope and easy to pull out for easy use.
- Installation instructions on the envelope inside with accessories to be mounted to pour the contents through the valve. Each bag contains the application table.
- Product also compatible with TPMS.
- There is no need to balance.
- Ecological product for disposal.
- Sector-specific truck and construction equipment.

Code	Desc.	Content gr.
3970012500	120XS	120
3970012510	180S	180
3970012520	230M	230
3970012530	290L	290
3970012540	350XL	350

Application table

A	B	A	B	TAGLIA	A	B	TAGLIA	A	B	TAGLIA
315/70R	22,5	31/10,5	15	XS	275/65	18	S	385/55	22,5	XL
		265/75	16	XS	265/70	18	XS	285/60	22,5	L
		235/85	16	XS	275/70	18	S	295/60	22,5	L
		285/70	17	S	385/55	19,5	XL	305/60	22,5	L
		215/70	17,5	XS	255/60	19,5	S	315/60	22,5	L
		265/70	17,5	S	385/65	19,5	XL	500/60	22,5	XL+XL
		215/75	17,5	XS	225/70	19,5	M	385/65	22,5	XL+XS
		245/75	17,5	S	245/70	19,5	S	425/65	22,5	XL+S
		315/80	17,5	L	265/70	19,5	S	445/65	22,5	XL+S
		8,5	17,5	XS	275/70	19,5	M	255/70	22,5	M
		10	17,5	M	285/70	19,5	M	265/70	22,5	M
		225/75	16	XS	295/70	19,5	M	275/70	22,5	L
		285/75	16	S	305/70	19,5	L	305/70	22,5	L
		245/70	17	XS	315/70	19,5	L	315/70	22,5	L
		245/75	17	XS	275/65	20	S	295/75	22,5	XL
		235/70	17,5	XS	405/70	20	XL+XS	315/75	22,5	XL
		315/70	17,5	M	375/75	20	XL+XS	345/75	22,5	XL
		225/75	17,5	XS	425/75	20	XL+S	350/75	22,5	L+XS
		205/80	17,5	S	275/80	20	L	445/75	22,5	L+L
		225/90	17,5	S	335/80	20	XL	255/80	22,5	M
		9	17,5	S	475/80	20	XL+XL	275/80	22,5	L
		245/75	16	XS	365/85	20	XL+XS	295/80	22,5	XL
		215/85	16	XS	395/85	20	XL+S	315/80	22,5	XL
		265/70	17	XS	10,5	20	L	11	22,5	L
		235/80	17	XS	12,5	20	XL	12	22,5	XL
		245/70	17,5	XS	14,5	20	XL+XS	13	22,5	XL
		205/75	17,5	XS	24	20,5	L	405/70	24	L+L
		235/75	17,5	S	495/45	22,5	XL+S	445/70	24	XL+L
		225/80	17,5	S	355/50	22,5	XL	455/70	24	XL+XL
		8	17,5	XS	435/50	22,5	XL+XS	495/70	24	XL+XL
		9,5	17,5	S	445/50	22,5	XL+XS	285/75	24,5	XL
					455/50	22,5	XL+XS	11	24,5	XL
					275/65	18	S	385/55	22,5	XL