

## Striper for tires



- Tool suitable for regrooving of tires for industrial vehicles and construction equipment.
- The intervention of regrooving is to reproduce the design of the grooves, by removing the rubber pad below this' can extend the life of the tire.
- Article suitable for tire, truck drivers, construction, etc.
- The tire suitable for regrooving must state on the side marked "regloovable" or the symbol "u".
- The 11 positions for heating the engraving allow a wide range of applications making the article extremely professional.
- The blades are not included in the package.

Code	Desc.
3970001310	14/2RIG

Technical Features	
Power supply cable length (cm)	220
Length cable support, bladesport (cm)	150
Total weight	6320
Weight blade holder support (gr)	500
Progressive regulation	0-11
Supply voltage (v)	220
Max power consumption (W)	400

Spare Parts		
Article	Code	Description
HEAD DOOR BLADES COMPLETE V. MODEL	3970001340	14 TPL
COUPLE HEADS SPARE V. MODEL	3970001350	14 CP
COUPLES SCREW HEADS FOR SPARE V. MODEL	3970001360	14 CV
HEAD DOOR HANDLE BLADES AND RIG 14/2	3970001338	14 TN

## Blades for striper tires

LAME ROTONDE

LAME QUADRE



- Lame round and square provided in box no. 2 pcs.

Code	Desc.	Shaped blade	Width cut mm
3970001315	14 LR	ROUND	2 MM
3970001316	14 LR	ROUND	3 MM
3970001317	14 LR	ROUND	5 MM
3970001318	14 LR	ROUND	7 MM
3970001319	14 LR	ROUND	9 MM
3970001330	14 LQ	SQUARE	2 MM
3970001331	14 LQ	SQUARE	4 MM
3970001332	14 LQ	SQUARE	6 MM
3970001333	14 LQ	SQUARE	8 MM
3970001334	14 LQ	SQUARE	10 MM

## Pliers for counterweights



- Ideal for installing and removing the weights from the rim

Code	Desc.
4430027300	339

## Tool mounting weight



- Tool for fitting counterweights.
- Particularly suitable for mounting counterweights German cars and Chrysler.

Code	Description
3970001395	14 ME-TOOL ASSEMBLY COUNTERWEIGHTS

## Tool bars remove adhesive



- Completely Teflon to avoid damaging the rim.
- Ideal for removing adhesive from tool bars balancing alloy wheels.

Code	Description
3970001390	14RIM-REMOVE TOOL BARS

## Tool fitting valves



- Ideal for use with trip valves rubber for vans and commercial vehicles.
- With short design 15 mm.

Code	Description	Article
3970001100	11	All metal
3970001110	11 / Plastic	Plastic and metal tip + unscrews internal valve

## Tool unscrews interior plastic



- Specific tool to remove the mechanism located inside the valve.
- One side valve motorcycle-car-truck, one hand for civil engineering.

Code	Desc.
3970003300	33


## Plasters for marking (steatite)



- Also write on wet tires.

Code	Desc.	Color	Ø mm
3970002400	24	WHITE	14
3970002500	25	YELLOW	14

## Spherical pencil rasp

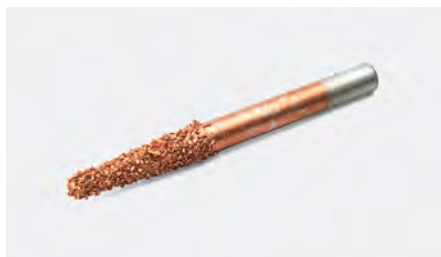

- For use with electric or pneumatic die grinder.
- To clean the inside of the tire before the repair.

Code	Desc.	Ø stem (mm)	Length mm
3970011000	110	6	65

## Mola curved profile



- To clean the inside of the tire before the repair.
- For use with adapter n / s art. cod. 397 00 11200-112.

Code	Desc.	Dimensions mm	Tthread	Grain
3970011100	111	ø 50x25	3/8"x24 UNF	36

## Adapter for grinder



- Specific wheel n / s art. cod. 397 00 11100-111.
- Adapter to be mounted on pneumatic or electrical grinders straight.

Code	Desc.	Length mm	Ø stem (mm)	Tthread
3970011200	112	47	6	3/8"x24 UNF

## Cutters carbide (or carbide) for tire repair



- For internal repairs of tires, are used to clean and prepare the positioning of mushrooms repair.
- Cutters are sintered metal carbides (tungsten carbide).
- They must be used with a straight grinder 22.000giri / min. NS CODE 4180006700.

Code	Desc.	Diameter mm
3970012450	3	D.3
3970012460	6	D.6
3970012470	9	D.9

## Measuring tread



Code	Desc.	Characteristics
3970002350	23/1	Entirely metal-spring for securing the pockets
3970002360	23/2	All metal-delivered in a box
3970002370	23/3	Digital meter tread

## Roller for repairs



- Measuring: D.40 x 4 mm
- Ideal for adhering patched tire.

Code	Description
3970012480	Roller

## Lever tires



- Tire lever in chrome vanadium steel.
- Zinc-chrome execution.

Code	Desc.	L mm	h mm
4430039910	444	300	22,0
4430039920	444	400	24,5
4430039930	444	500	26,0
4430039940	444	600	28,0

## Bushings for alloy wheels



- Long sleeves hexagonal version for alloy wheels.
- The special outer coating made of plastic you can not scratch the rim while the internal protection protects against scratches nuts or shiny chrome.
- Particularly suitable for tire specialists, mechanics, body shops and repair shops generally.

Code	Desc.
4430049910	974 - 17
4430049920	974 - 19
4430049930	974 - 21

## Series compasses for wheels



- Kit version hexagonal long sleeves for alloy wheels.
- The special outer coating made of plastic you can not scratch the rim while the internal protection protects against scratches nuts or shiny chrome.
- Particularly suitable for tire specialists, mechanics, body shops and repair shops generally.

Code	Desc.	Content	Application
4430049900	974S	3 BUSHES ATT. 1/2 "	UTILITY = M17 M19 M21 = = BERLINE VETT. JAPANESE AND OFF-ROAD

## Impact torsion bars



- Torsion bars for tightening wheel nuts.
- Used only with impact wrench.
- Pre-calibrated for different tightening torques.
- With square male-female 1/2 ".
- Full assortment to cover all needs fixing.


**ATTENZIONE**

TABELLA APPLICATIVA INDICATIVA	
<b>Cerchi in ferro</b>	BARRA ROSSA
<b>Cerchi in lega leggera</b>	BARRA ROSA
<b>Cerchi Mercedes e furgoni</b>	BARRA BIANCA

LA COPPIA PUO' ESSERE INFLUENZATA DAL TIPO E CONDIZIONI DI AVVITATORE, BULLONE O DADO E ARIA DI ALIMENTAZIONE. SI CONSIGLIA PERTANTO DI EFFETTUARE UN CONTROLLO CON CHIAVE DINAMOMETRICA

Code	Desc.	Color	Torque Nm	Female	Male	Ø mm	L mm	Hooking type
4430049450	934 - 80	Rosso	÷ 75	1/2"	1/2"	25,5	152	Red
4430049455	934 - 120	Pink	÷ 120	1/2"	1/2"	25,5	152	SPHERE
4430049460	934 - 170	White	÷ 160	1/2"	1/2"	25,5	152	SFERA

## Compasses bolt damaged 1/2 "



- Socket set with coned coil.
- Suitable for car workshops, tire repairers and bodywork.
- Allow it to loosen and remove easily, safe and timely nuts and bolts locked, with threads or damaged heads and / or rounded.
- Particularly useful to remove bolts "theft" mounted on the wheels of most cars on the road.
- The conical helical profile allows the compass to firmly engage the screw or bolt in order to create a sturdy grip.
- The series carries a lower expenditure of time and energy in the process of unlocking and less risk of damage to the bolt.
- Content box: 4 sleeves with 1/2 "metal rod to eject the 80mm bolt compasses.

Code	Desc.	Content
4770005320	620	Kit 4 compasses conical coil: 17-19-21-23 mm
4770005321	620/17	17 mm
4770005322	620/19	19 mm
4770005323	620/21	21 mm
4770005324	620/23	23 mm



## Guns inflates tires Professional EEC



- Available with pressure gauge  $\varnothing$  63 and 80 mm.
- Pressure 0 ÷ 10 bar.
- Tube length 100 cm.
- Bayonet.
- \* For n / s art. cod. 345 00 345 00 01530 to 1159 and from 01,576 to 1,167.

Code	Desc.	Characteristics
3450001530	1159	GUN WITH MAN. $\varnothing$ 63 EEC
345RC03770	377	SPARE MANOMETER $\varnothing$ 63 EEC
345RC03760	376	PIPE REPLACEMENT COMPLETE *
3450001576	1167	GUN WITH MAN. $\varnothing$ 80 EEC
345RC04000	400	SPARE MANOMETER $\varnothing$ 80 EEC

## Inflating gun eurodainu



- Built under license Michelin.
- Manometer  $\varnothing$  90 mm.
- Maximum pressure 11 bar.
- Tube length 150 cm.
- Air connection 1/4 "female gas.

Code	Desc.	Characteristics
3450001577	1168	GUN EURODAINU SCALE ONLY BAR
345RC03180	318	PIPE REPLACEMENT FEMALE THREAD
345RC03190	319	PIPE REPLACEMENT MALE THREAD

## Eurodainu inflating gun with double scale bar-psi



- Built under license Michelin.
- Manometer  $\varnothing$  90 mm.
- Pressure 0 ÷ 12 bar.
- Tube length 150 cm.
- Air connection 1/4 "female gas.

Code	Desc.	Characteristics
3450001578	1168-Bar-Psi	EURODAINU GUN WITH DOUBLE SCALE BAR AND PSI
345RC03180	318	PIPE REPLACEMENT FEMALE THREAD
345RC03190	319	PIPE REPLACEMENT OLD THREAD MALE MODEL

## Head for tire inflators



- Replacement head for n / s art. cod .: 345 00 01530-1159; 345 00 01576 to 1167; 345 00 01577-1168; 345 00 01577- 1168.

Code	Desc.
345RC03840	384

## Inflation nozzle for wheels



- Ideal where space is a problem for inflation.
- Apply directly to the head of the inflator without removing anything.

Code	Desc.	L. tot.
345RC03841	384/1	cm 33

## Precision manometer "Quicker"



- Precision pressure gauge for monitoring the tire pressure.
- It ensures total reliability 'of reading done.
- Particularly appreciated by the preparatory team ran two four wheels.

Code	Desc.
4770001250	125

## Manometer feedback



- Only for tire pressure control.
- Manometer ø 63 mm.
- Pressure 0-12 bar.
- Tube length 40 cm.

Code	Desc.
3450001520	1158

## Tire inflator



- Portable tire inflator.
- It is equipped with a coil and pressure gauge for inflation / deflation of the tire.
- Tank equipped with EC testing.

Code	Desc.	Tank capacity LT
4430045600	598	10

Spare Parts		
Article	Code	Description
GUN PARTS	4430045602	598/P
SPIRAL	4430045614	599/3
MONOMETRO DI RICAMBIO SERBATOIO	4430045603	598M

## Centers wheels cart



- Cart centering.
- Suitable for car workshops and VI, VI and auto body shops, tire shops.
- It allows to lift, carry and center in a simple way and with minimum effort the tires on the bolts of the hub.
- Especially useful for people who has to operate alone or in the presence of heavy tires and large in size.
- It is equipped with arms with rotating rollers mounted on bearings for a more 'easy search of centering.
- Provided with two rubber wheels and four in plastic, of which two parts.
- Three settings for tires 6.5 "to 22.5".
- Supplied with small parts for mounting.
- Handle length: 990 mm.
- Overall Width: 700 mm.

Code	Description	Weight Kg.
4700001720	2502 - Centering cart	11,2

Spare Parts	
Code	Description
4700001730	2502R - Ruota ant.nera
4700001740	2502RP Ruota post. bianca



## Static balancer for motorcycles



- Hand Tool to verify the correct balancing of the tires of the bikes. Painted steel structure, with bubble for perfect positioning. For workshops, tire. Supplied disassembled.
- Specifications: For wheels up to 21". With pin diameter and 12mm diameter cones max 40mm. Supplied disassembled for safety in transport. Dimensions: LCM 50xPcm20xHcm50
- N: B: Ducati 916,748,998, e996, BMW motorcycles and maxi scooters can be balanced only by using the appropriate adapters.
- Instructions: A) Remove a cone from the auction of media, insert the wheel to be balanced, put the cone and tighten the Allen screw just enough to secure the position. Always place the wheel as much as possible to the center of the shaft. Place the two cones so that the two Allen screws are opposite each other, to prevent weight imbalances.
- B) Place the wheel with the wheel on the balancing machine, making sure that the rod correctly rests in the middle of the disks on which must rotate the rod.
- C) Turn the wheel in order to visually check whether the tire is fitted properly in the center. After this occurs stop the wheel in any position.
- D) Leave the wheel free to move, if the wheel is unbalanced it will slowly begin to move then going to stop the heaviest part below.
- E) At this point we have a chalk mark with the highest point of the wheel (diametrically opposite the heaviest point of the wheel).
- F) At the point found to be affixed to the leads adhesives, possibly at the center of the wheel rim. The faster the movement of the wheel towards the heaviest part, the greater the weight to be applied.
- G) To see if the weight is correct, rotate the wheel ¼ turn and check that the wheel remains firm, repeat 3 more times to do testing at the four cardinal points. After this occurs, the balancing operation is to be considered completed

Code	Desc.	Characteristics
4700005920	2626	Per cerchi fino a 21"



Codice	Desc.	Accessori
4700005921	2626 SR	Kit centraggio cerchi - Foto 1
4700005922	2626-A01	Kit adattatori ruote monobraccio - Foto 2
4700005923	2626-A02	Kit adattatori ruote BMW - Foto 3
4700005924	2626-A03	Kit con perno per ruote scooter - Foto 4 (d.10)
4700005925	2626-A04	Kit adattatori Piaggio x9 - Foto 5 (d.16)
4700005926	2626-A05	Kit adattatori ruote BMW dal 2006 - Foto 6
4700005927	2626-A00	Perno standard in dotazione con coni - Foto 7 (d.12)
4700005928	2626-ACR	Cono ricambio standard diam max40mm - Foto 8

## White paste PNEU - ideal for cars and motorcycles



- Pasta lubricant and sealant for installation of car and motorcycle tires.
- Lubricates the treated part by preventing slippage of the tire during mounting.
- It regenerates and protects the rubber in part where it needs a seal on the rim (bead).
- A plant-based, soft doughy.
- Leaves no stain on the tire (white halo).

Code	Desc.	Content Kg
4110015155	2859	4

## Black paste PNEU - ideal for cars and motorcycles



- Pasta lubricant and sealant for installation of car and motorcycle tires.
- Lubricates the treated part by preventing slippage of the tire during mounting.
- It regenerates and protects the rubber in part where it needs a seal on the rim (bead).
- A plant-based, soft doughy.
- Leaves no stain on the tire-stain.

Code	Desc.	Content Kg
4110015161	2860N	5

## Blue paste pneumatic - for low-profile tires and RUNFLAT



- Pasta lubricant and sealant for the mounting of car tires inflated runflat or, that due to the hardness of the shoulder of the tire with the normal pulp would be difficult.
- Lubricates the treated part by preventing slippage of the tire during mounting.
- It regenerates and protects the rubber in part where it needs a seal on the rim (bead).
- A plant-based, soft doughy.
- Specification for assembly machines and automatic tire fitting alloy wheels.

Code	Desc.	Content Kg
4110019990	6321	4

## Yellow pasta PNEU - ideal for TRUCK



- Pasta lubricant and sealant for mounting tires VI and earthmoving.
- Lubricates the treated part by preventing slippage of the tire during mounting.
- It regenerates and protects the rubber in part where it needs a seal on the rim (bead).
- A plant-based, soft doughy much like Michelins.
- Leaves no stain on the tire.

Code	Desc.	Content Kg
4110015160	2860	4

## Brush curved wood for pulp pneumatic



- Brush specific wood with curved bristles for applying paste on the heels of the tires.

Code	Description	D
3970012490	Brush Pneu	D. 51,8



## Tire repair kit - car



**PNEUMATICO RIUTILIZZABILE DOPO L'USO DEL KIT TRAMITE SEMPLICE LAVAGGIO INTERNO CON PANNO**

**SOSTITUISCE LA RUOTA DI SCORTA**

### 6 FACILISSIME OPERAZIONI

- 1- Prendere il kit all'interno della bauliera
- 2- Togliere la valvola
- 3- Inserire gel riparatore
- 4- Rimettere la valvola
- 5- Collegare spina compressore alla presa 12V del veicolo
- 6- Gonfiare il pneumatico con il compressore controllando la pressione ottimale con il manometro

- Necessary tool for the temporary repair of punctured tires.
- Suitable for tires tubeless.
- Usable in any condition: just insert the plug into the cigarette lighter socket of the vehicle.
- Equipped with a compressor and through which you can restore the optimal pressure of the punctured tire after entering the sealant.
- Multi-purpose compressor, ideal for: flat tires, balls, cots, bicycle wheels, etc ..
- It avoids the awkward presence of a spare wheel.
- The presence of the pressure gauge reading absolutely allows a precise inflation pressure.
- Complete with sock protects compressor.
- The liquid of the tire repair kit does not affect the internal structure of the tire. With a simple cleaning by the tire through cloth and subsequent repair, the tire and 'reusable again.

### TECHNICAL FEATURES

- Plastic body.
- Repairs up to max diameter hole: 6 mm.
- Compressor size: 14,5x16,5 cm.
- Weight: 1.55 kg.
- Max pressure: 300 Psi.
- The sealant and effective at temperatures not lower than -40° C.

Code	Desc.
3970012200	410

## Spray sealant charging



- Replacement sealant in a practical canister.
- The sealant and 'effective at temperatures not lower than - 40 ° C.

Code	Description	Content ml
3970012250	410/R	473
3970012360	Dispensing cap	-

## No stop



- Inflate and repair immediately punctured tires.
- It can be used on pneumatic air chamber that tubeless.
- It applies the tube connecting the cylinder to the tire valve after eliminating the cause of the puncture. Then press the nozzle to inflate the tire.
- Just can proceed to check tire pressure.
- It is not suitable for large lacerations.

Code	Desc.	Content ml
4110010700	2692	300
4110015480	3050	200

## Kit repair tubeless tires



- In case.

Code	Desc.	Content	Applications
3970011300	113	50 STRINGS 1 RASP 1 ATTR. A "T" WITH NEEDLE	KIT FOR CARS AND MOTORCYCLES
3970011400	114	25 STRINGS 1 RASP 1 ATTR. A "T" WITH NEEDLE	KIT FOR TRUCKS

Spare Parts				
Applications	Article	Code	Description	Photo
FOR CARS	TOOL T	3970011340	113/T	1
FOR CARS, TRUCKS AND MOTORCYCLES	RASP SPARE	3970011460	113/R	2
FOR CARS	NEEDLE SPARE	3970011350	113/1	3
FOR TRUCKS	NEEDLE SPARE	3970011450	114/1	4



## Strings self vulcanizing



**MATERIALE AUTOVULCANIZZANTE**

- Strings parts for kit Ripar. tires.

Code	Desc.	Length in inches	Applications
3970011500	115	4"	CARS-MOTO
3970011600	116	8"	TRUCKS

## Materiale autovulcanizzante.

### Istruzioni

LA STRINGA AVRÀ ASSUNTO QUESTA FORMA FACENDO IN MODO CHE QUANDO SI AUTOVULCANIZZERÀ GRAZIE AL CALORE DATO DALLA VELOCITÀ DEL VEICOLO LA RIPARAZIONE SARÀ SIA INTERNA SIA SU TUTTO LO SPESSORE DEL PNEUMATICO, IMPEDENDO ALL'ACQUA DI ENTRARE E MAGARI CREARE RUGGINE NELLE TELE METALLICHE.



**1** RIMUOVERE OGNI OGGETTO DALLA GOMMA



**2** PULIRE ED ALLARGARE IL FORO CON LA RASPETTA



**3** INSERIRE LA STRINGA NELL'ATTREZZO A "T" CON AGO



**4** SPINGERE LA STRINGA NELLA GOMMA SUPERANDO LO SPESSORE DEL PNEUMATICO



**5** ESTRAENDO L'ATTREZZO L'AGO LASCERA' LA STRINGA NELLA GOMMA



## Mushroom tire repair standard



- Only for use with punctures penetration angle to the perpendicular of less than 20 °, if further utilize the pieces of repair.
- Material self vulcanizing Patch Rubber.
- Car-commercial vehicles-trucks.

Code	Desc.	Measures
3970012000	250	9X76 mm
3970011980	248	6x75 mm
3970011970	246	3x40 mm

## Mushroom repair radial tires and bias ply



- Only for use with punctures penetration angle to the perpendicular it is less than 20 °, if further utilize the pieces of repair.
- Material self vulcanizing SPEEDY PLUGS.
- Car-commercial vehicles-trucks.

Code	Desc.	Measures
3970012050	300	3X47 mm
3970012055	305	6X57 mm

## Patches for repairing inner tubes



- Material self vulcanizing.
- Provided in the box.
- Type of material "Chemical Cure".

Code	Desc.	Diam. mm	Form
3970011700	120	28	ROUND
3970011710	125	38	ROUND
3970011720	130	51	ROUND
3970011730	135	57	ROUND
3970011745	145	114	ROUND

## Patches for repairing tubeless radial



- Material self vulcanizing Patch Rubber.
- These patches are used to repair holes and damage to the radial tires of commercial vehicles-cars, trucks and earth moving.
- They have a special reinforcement that reduces the effects of the downturn.
- They can be used on the crown, shoulder and sidewall.

Code	Desc.	Measures	Form
3970011800	150	55X70 mm	SQUARE
3970011810	155	65X110 mm	SQUARE
3970011820	160	75X135 mm	SQUARE
3970011825	165	70X115 mm	SQUARE
3970011830	170	75x140 mm	SQUARE
3970011840	175	105x205 mm	SQUARE

## Universal patches for holes



- These patches are used to repair minor repairs on all types of tires of radial or diagonal weave cars-VI-truck-heavy.
- Both on inner tubes on both tubeless.
- To bore small holes - maximum 9mm.
- For repairs of crown-shoulder-hip.

Code	Desc.	Measures	Form	Applications
3970011900	180	45X45 mm	SQUARE	For holes up 3mm
3970011910	185	55X55 mm	SQUARE	For holes from 3 mm to 6 mm
3970011920	190	67X67 mm	SQUARE	For holes from 6 mm to 9 mm

## Diagonal patches CX



- Patches used to repair section, reinforcements, holes on car tires, industrial vehicles and earth moving.
- Suitable for applications also on bias ply tires, tubeless or with an air chamber.

Code	Desc.	Diam. mm	Form
3970011950	200	76	OCTAGONAL
3970011960	205	95	OCTAGONAL

## Solution for vulcanizing-bonding pieces mushrooms and strings



- Solution self vulcanizing.
- It has a quick-drying, speeds up the repair time.
- Eliminate defects in repairs due to incomplete drying time.
- Activates the chemical process that adheres units (pieces-fungi) to the tire.

Code	Description	Content	Characteristics
3970012100	350	200 ml	Transparent color, extra fast drying
3970012151	401 / Blue	200 ml	Blue-speed drying media

## Sealant heels tires



- It is a chemical solution to seal the tire beads.
- The heel is the part of the tire which in contact with the rim.
- Form a watertight seal between tire and rim, usable all times that the circle does not seal perfectly with the tire.
- Black Colour.

Code	Desc.	Content	Color
3970012152	402	Bead sealer-1 lt	black

## Sealant repairs



- It is a solution that allows you to seal the patch when applied and glued, covering the area where it is frosted excess tire for the application of the patch.
- Black Colour.

Code	Desc.	Content	Color
3970012150	400	Repair sealer-473 ml	Black

## Liquid for the cleaning of the tires



- Cleaning fluid, tires and inner tubes.
- Suitable for tire and repair shops generally.
- Allows the complete elimination of all contamination deposited around the injury (eg graphite, silicon, etc ..).
- Prepare the surface in an optimal way to allow for a speeding up of successive stages of repair.
- Effectively dissolves the release agent used in the production of tires. To be used after the operation of the buffing inside the tire, before applying the solution self vulcanizing (ns cod 3970012100).
- Particularly useful to remove residual adhesive left by balancing weights.
- Supplied with nozzle for accurate application of the liquid on the affected area.
- HOW TO USE:
- 1- After passing the wheel to apply the liquid to the working area and let stand for about 1 minute.
- 2- Remove the contamination using a scraper or a cloth.
- 3- proceed with the repair.

Code	Desc.	Content ml
3970012105	355	1000

## Specific product to remove all types of glue alloy wheels and steel



- Ready to use product for the easy cleaning of each type of surface to be hardened sealants.
- Effective on any type of sealant such as silicone, acrylic, polyurethane, MS polymer, etc ..
- Applicable on almost any surface without injuring it: raw metals and painted, ceramics, laminates, glass, aluminum.
- Do not use on surfaces made of nylon.

Code	Desc.	Color	Cont. ml
4110016480	4055	TRANSPARENT	400



## Bags brings tires




- Particularly suitable for tire.
- Many benefits to the end user: withdrawal of the replaced tire in a practical way, without the risk of getting dirty and smearing of the trunk of their car, tidy in the garage.
- Improve the quality and image of the service offered to the end customer certifying the attention and care for the goods of its customers. 1 Reel: 100 bags.
- Used with our wall mount plastic or metal cod cod 4440100250 4440101700.
- material color: white with Meccanocar logo or customer logo.
- Meccanocar gives the ability to customize the product with their own brands up to a maximum of 5 colors with a minimum quantity of 10 coils.
- Print Space: 2 reps max 300 x 300 mm.

Code	Desc.	Print
4440101800	100/M	Meccanocar
4440101805	100/1	1 color
4440101810	100/2	2 color
4440101815	100/3	3 color
4440101820	100/4	4 color
4440101825	100/5	5 color
4440101915	395/M	Meccanocar
4440101920	395/1	1 color
4440101925	395/2	2 color
4440101930	395/3	3 color
4440101935	395/4	4 color
4440101940	395/5	5 color

Tecnical Features	
Sheet count	100
Sack dimension mod.100	56+15+15*110 cm
Coil weight in Kg	6,7
Sack dimension mod.395	76+15+15*110 cm
Material	Polyethylene
Thickness	40 micron

## Labels for tires



- Identification tags for tires.
- Suitable for tire dealers, repair shops, body shops.
- Allow quick and easy recognition of the tires of the end user during their stay in stock.
- Easy to apply on the tire thanks to clamp opened and closed.
- The paper labels are protected from humidity 'with the appropriate tags in reusable plastic over time.
- Set consists of 100 labels, tags 100 and 100 plastic ties.
- Label measures: 104 x 148 mm.
- Maximum diameter tire: 240 mm.

Code	Description
3970012400	470 - Complete set
3970012405	475 - Paper labels 100 pieces



## Coupons for tire adhesives



- Material: PVC adhesive.
- Practical coupons adhesives suitable for certify the servicing.
- Useful as a reminder to the end user in future inspections.
- Customization: Digital printing.
- Measurements: H150xL100 mm.
- On request the coupons can be fully customizable.
- Adhesive overwritten with crayon.

Code	Desc.
4720035390	2990