

Alkaline batteries X-Power



- Alkaline batteries.
- Ideal for any application.
- They provide reliable performance and long life in a wide range of everyday devices.
- Not rechargeable.



Code	Desc.	Voltage (V)	Diam. mm	Height mm	Weight gr.	Model	Dimensions
5120001000	350-LR20	1,5	34,2	60,0	140,6	Torch	D
5120001010	355-LR14	1,5	25,4	50,0	67,4	1/2 torch	C
5120001020	360-LR6	1,5	14,1	50,5	23,1	Stylus	AA
5120001030	365-LR03	1,5	10,5	44,5	11,4	Penlight	AAA
5120001040	370-6LF22	9	17,5X26,5	48,5	46,1	Transistor	9V

Extreme Lithium batteries




- Lithium batteries.
- Designed for discerning customers who demand the most from their battery powered devices.
- Ideal for the most varied applications, guarantee performance and a longer life than regular alkaline batteries.
- 700% more energy.
- Weighing less than 30% than alkaline batteries.
- not rechargeable



Code	Desc.	Model	Dimensions	Voltage (V)	Height mm	Diam. mm	Weight gr.
5120001200	500 - FR6	Stylus	AA	1,5	50,5	14,1	15,4
5120001210	505 - FR03 M	Penlight	AAA	1,5	44,5	10,5	7,2

Batteries for remote controls

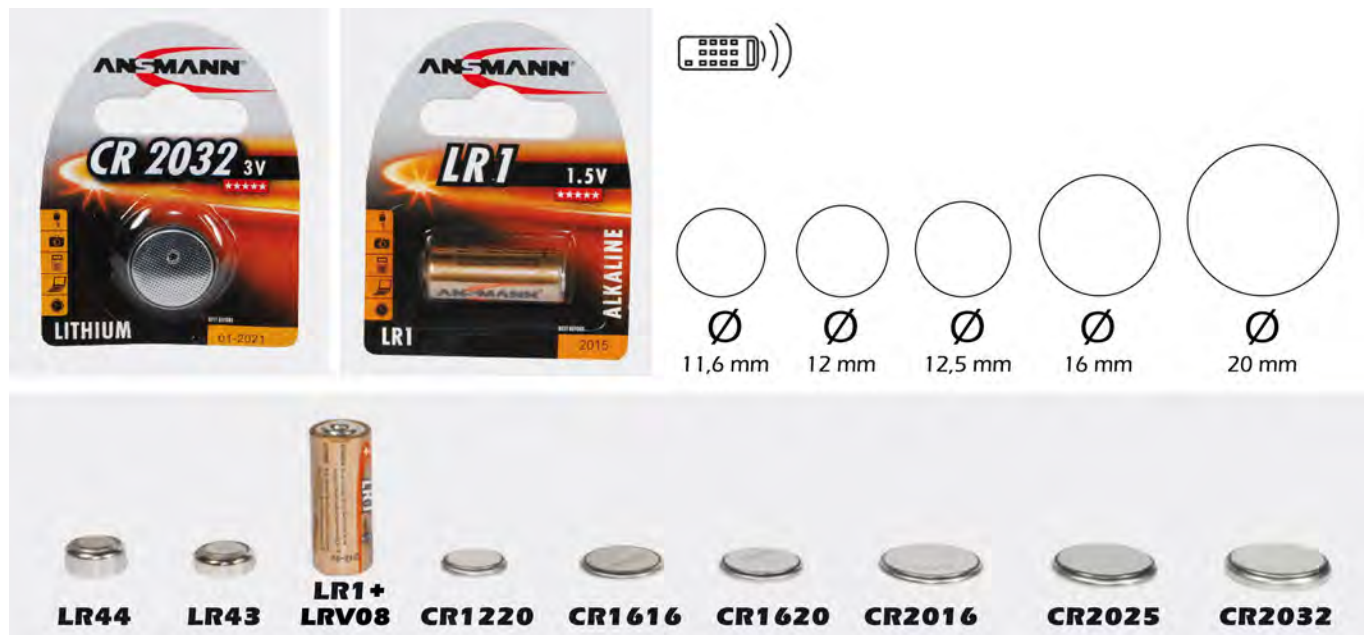

3

- Stacks of high quality to feed electrical devices including remote controls, watches, calculators, computers and other applications.
- Ensure reliable performance and long life.

Code	Desc.	Voltage (V)	Height mm	Diam. mm	Weight gr.	Type	Capacity (mAh)
5120001050	375 - LR44	1,5	5,4	11,6	2	Alcaline	115
5120001060	380 - LR43	1,5	4,2	11,6	1,6	Alcaline	75
5120001070	385 - LR1	1,5	30,2	12,0	9,2	Alcaline	/
5120000250	250 - LRV08	12	28,9	10,3	6	Alcaline	33
5120001080	390 - CR1220	3	2,0	12,5	0,9	Litio	40
5120001090	395 - CR1616	3	1,6	16,0	1,2	Litio	50
5120001100	400 - CR1620	3	2,0	16,0	1,3	Litio	70
5120001110	405 - CR2016	3	1,6	20,0	1,7	Litio	75
5120001120	410 - CR2025	3	2,5	20,0	2,5	Lithium	150
5120001130	415 - CR2032	3	3,2	20,0	3,3	Lithium	210

Rechargeable batteries Ni MH Professional



- Rechargeable batteries supplied preloaded in sizes AA, AAA and 9V transistor.
- Long duration.
- Able to hold a charge for one year without use up to 80%.
- Recommended for apparecchiature high absorption.
- We recommend the use of our battery charger Powerline 4 (512 00 00500) or powerline 5 (512 00 00600).

Code	Desc.	Model	Dimensions	Voltage (V)	Capacity (mAh)	Height mm	Diam. mm	Weight gr.
5120000320	320-RC01	Stylus	AA	1.2	2500	50.5	14.5	27,5
5120000325	325-RC02	Stylus	AAA	1.2	800	44.5	10.5	12
5120000330	330-RC03	transistor	9V	9	250	48.5	16x26.5	41,5

Professional Charger Powerline 4



- Professional charger for rechargeable AA and AAA.
- Supplied with 4 AA style batteries.
- It can power both in-100-240V AC and 12V-DC cigarette lighter with special connector supplied as standard.
- Releases automatically from the network as soon as the batteries are fully charged.
- Monitoring of individual charging compartments.
- Multiple protection against overload.
- Recognition alkaline batteries and defective.



Tipo	Capacità	Tempo di ricarica
Stilo AA	2500mAh/maxE+	3.5 h
/	2100mAh	3 h
/	1000mAh	1.5 h
Mini Stilo AAA	1000mAh	3 h
/	800mAh	2.5 h
/	500mAh	1.5 h

Code	Desc.
5120000500	PW500

Professional charger Powerline 5



- Professional charger for AA rechargeable batteries, AAA, D torches, mezzetorce C, 9V transistor.
- Supply 100-240V AC.
- It automatically disconnects as soon as the batteries are fully charged.
- Display charge status through LCD and LED.
- Monitoring of individual charging rooms.
- For cylindrical cells: multiple overload protection, recognition defective and alkaline batteries.

Tipo	Capacità	Tempo di ricarica
MiniStilo	800mAh	2h
/	1000mAh	2.5h
Stilo AA	2100mAh	2.5h
/	2700mAh	3h
MezzaTorce C	3000mAh	3.5h
/	4500mAh	5.5h
Torce D	8000mAh	10h
/	10000mAh	12h
Transistor 9V	120mAh	10h
/	250mAh	20h

Code	Desc.
5120000600	PW600

6V Battery for lamps



- Battery for our lamps art. 08022- 446 446 00 00 09500-446 00 08023-446 00 09505.

Code	Desc.
4460008021	4038/1

