

Insulating tape Meccanocar



- Duct tape adhesive PVC self-extinguishing.
- Suitable for different uses, including: insulate cables, terminals, connectors and electrical contacts, create wiring and dressings of quality '.
- Article suitable for use in electrical civil and industrial, maintenance sector, elettrauto, mechanical, bodywork, automotive, etc ..
- The high property 'and elastic adhesive tape are preserved both in winter and in summer.
- Available in different colors for the identification of the different cable harnesses or electrical contacts.
- Excellent stability, elasticity ', aging resistance, abrasion, weathering, alkalis.
- Tape thickness 0.15 mm.
- Meets CEI EN 60454.

Code	Desc.	Width mm	Length mt	Color
4060008000	30/15X25	15	25	BLACK
4060008010	30/19X25	19	25	BLACK
4060008020	30/15X10	15	10	BLACK
4060008240	36/50x25	50	25	BLACK
4060008050	31/19X25	19	25	GREY
4060008060	31/15X10	15	10	GREY
4060008080	32/19X25	19	25	RED
4060008090	32/15X10	15	10	RED
4060008110	33/19X25	19	25	BLUE
4060008120	33/15X10	15	10	BLUE
4060008140	34/19X25	19	25	WHITE
4060008150	34/15X10	15	10	WHITE
4060008170	37/19X25	19	25	YELLOW / GREEN
4060008180	37/15X10	15	10	YELLOW / GREEN
4060008190	35/19X25	19	25	BROWN
4060008200	35/15X10	15	10	BROWN
4060008220	36/19X25	19	25	YELLOW
4060008230	36/15X10	15	10	YELLOW
4060008240	36/50X25	50	25	BLACK

Kit tape Meccanocar



EN60454

- Assortment tape adhesive PVC self-extinguishing.
- Complies with cei en 60454.
- Suitable for use in electrical civil and industrial, maintenance sector, elettrauto, mechanical, bodywork, automotive, etc.
- Total pieces: 10 pcs.

Code	Description
4060008300	19900

CONTENUTO KIT:

CODICE	DESCRIZIONE	QUANTITA'
406 00 08010	30/19X25-NASTRO ISOLANTE NERO	3
406 00 08050	31/19X25-NASTRO ISOLANTE GRIGIO	1
406 00 08080	32/19X25-NASTRO ISOLANTE ROSSO	1
406 00 08110	33/19X25-NASTRO ISOLANTE BLU	1
406 00 08140	34/19X25-NASTRO ISOLANTE BIANCO	1
406 00 08170	37/19X25-NASTRO ISOLANTE GIALLO/VERDE	1
406 00 08190	35/19X25-NASTRO ISOLANTE MARRONE	1
406 00 08220	36/19X25-NASTRO ISOLANTE GIALLO	1

6

Tape insulating fabric



- Adhesive tape "rayon", used for insulation of electrical wiring car-motorcycle
- High qualities of adhesion and unwinding easier for agile application manual
- IMPORTANT: Apply the tape on dry, clean and free from grease.

Code	Desc.	Dimensions	Color
4060002800	19272	25 mt x 19 mm	BLACK

Tecnical Features	
Temperatura massima d'esercizio	°C 70
Adhesion to the plate	g./cm 400
Adhesion to the unreeling	g./cm 300
Lengthening at breaking	% 10
Breaking strength	Kg/cm ^q 7
Tipo di supporto	Rayon
Spessore nominale	mm 0.28

Insulating tape Felt



- Tape of polyester felt, with acrylic-based adhesive used for the isolation of electrical wiring cars, motorcycles and trucks.
- This coating also avoids the noise due to sliding and vibration of the cables, it is therefore excellent for use inside vehicles.
- IMPORTANT: Apply the tape on dry, clean and free from grease.

Code	Desc.	Dimensions	Color
4060002950	19274	25 mt x 19 mm	BLACK

Tecnical Features	
Resistenza alla temperatura	°C/h 125-500
Weight	g./cm ^q 220
Tipo di supporto	Polyester felt
Spessore nominale	mm 1
Breaking strength	Kg/cm ^q 4
Adhesion to the plate	g./cm 400
Lengthening at breaking	% 50

Self-amalgamating tape



- Self-amalgamating tape EPR (ethylene propylene rubber), used to repair and splice the power cables, reconstructing the primary isolation.
- Excellent sealing and excellent resistance to weathering and ultraviolet rays.
- **WARNING:** This product is not a tape. Its peculiarity is that, once applied, autoagglomerarsi transformed within minutes into a compact mass.
- Also excellent for use as a resetting of water pipes, in marine, motor sports, gardening, etc ..

Code	Desc.	Dimensions	Color
4060003000	19274	9.1 mt x 19 mm	BLACK

Tecnical Features	
Potere autosaldante	Excellent
Resistività di volume	Ohm/cm 1015
Rigidità dielettrica	Kv/mm 35
Lengthening at breaking	% 1.000
Breaking strength	Kg/cmq 10
Maximum load	Kg/cmq 20
Spessore nominale	mm 0.75
Tipo di supporto	EPR rubber

Tape aluminum foil



- Aluminum tape thickness 30 microns with acrylic adhesive and silicone paper liner.
- Excellent conformability, adhesion and high temperature performance.
- Mainly used in the refrigeration industry, in air conditioning, ventilation systems and in any application where it is necessary an adhesive tape with good characteristics of thermal conduction is to isolate that to seal.
- Excellent resistance to heat, cold and moisture.

Code	Desc.	Dimensions
4060003100	19275	50 mt x 50 mm

Tecnical Features	
Spegnimento delle gocce	0
Temperatura massima di utilizzo	°C -20/+50
Temperatura di applicazione	°C 0/+40
U.L. according classification	-
Velocità di propagazione della fiamma	5
Sviluppo dei fumi	0
Adhesion to the plate	g./cm 400
Adhesion to the back	g./cm 450
Lengthening at breaking	% 5
Tipo di supporto	Aluminum foil 30 microns
Spessore nominale	Micron 60
Breaking strength	Kg/cm 1.2

Packaging tape for PPL and PVC



- Tapes in recyclable polypropylene.
- Excellent closing, quick and quiet.

Code	Description	Formato	Color
4060400100	PPL-BEIGE	mm50x66m	BEIGE
4060400150	PPL-WHITE	mm50x66m	WHITE
4060400160	PPL-TRASPARENT	mm50x66m	TRASPARENT
4060400700	PVC BEIGE	mm50x66m	BEIGE


Taping manual



- Taping manual rolls h 50 mm.
- With adjustable brake.

Code	Description
4060400600	TAPING MANUAL

Saldanastro (Nastro Americano)

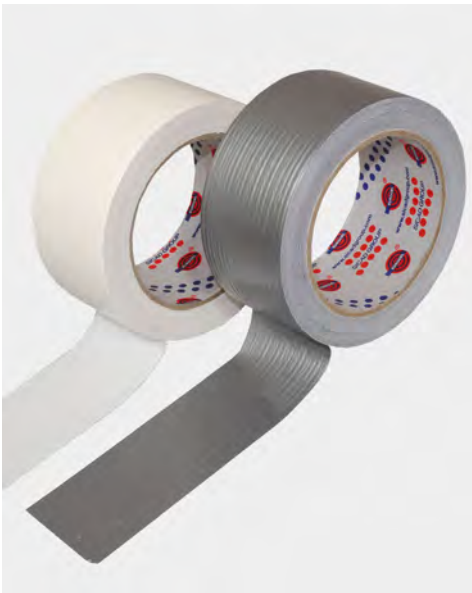

- Cloth tape coupled with PE.
- Ultra-strong tape with excellent adhesion.
- Excellent heat resistance: 100 ° continuously.
- Indicated for sealing ducts.
- For temporary repairs of sleeves.
- For the joining of materials phono and thermo insulation.
- Excellent impermeability.

Code	Description	Dimensions
4060600090	2550-WELDING TAPE	H mm50x25m
4060600091	2551-WHITE	H mm50x25m

Reinforced cloth tape for high temperatures




- Nastro telato ideale per carrozzieri
- Adesività 10 (N/25 mm), rimovibile fino a 30gg
- Resiste all'acqua
- Resiste raggi UV
- Resistenza al calore 93°C
- Ottima malleabilità
- Non lascia colla
- Utilizzato nelle operazioni di delimitazioni di parti di carrozzeria che devono essere sabbiate o levigate o trattate con abrasivi
- Utilizzato nelle operazioni di montaggio dei parabrezza.



Code	Description	Measures L x H mm	Body color
406060095	2555-NASTRO X CARROZZIERI H 50 X 25 M	25 X 50 MM	AZZURRO
4060002600	19270 - Duct Tape 27x19 mm	27 x 19 MM	Black
4060003200	19276 - Duct Tape 25x50 m	25 x 50 MM	Black

Double-sided foam tape for moldings

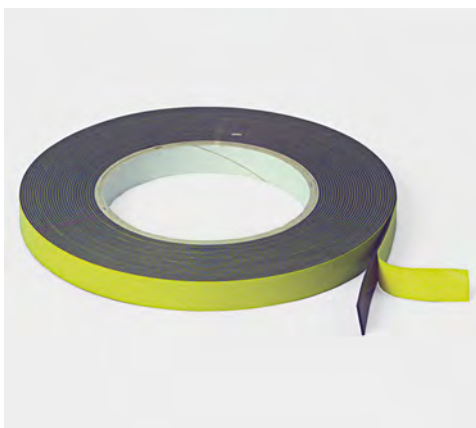

- Double-sided tape in expanded polyethylene foam, black, with acrylic-based adhesive in solvent.
- Suitable for applications of plastic profiles, plates, emblems and for uses in the automotive industry in general.
- High compressive strength, oils, plasticizers, UV and moisture '.
- Time of application immediate.

Code	Desc.	Color	h mm	L m
4060700050	2518	BLACK	6	10
4060700100	2519	BLACK	12	10
4060700120	2520	BLACK	19	10

Technical Features	
Resistenza alla temperatura °C	-20/+100
Adhesion to steel N/cm. AFERA 4001	13+/-2
Spessori ad. + supp. Micron PSTC 5	850+/-150
Density Kg/m3	200

Double-sided tape for carpet



- Double-sided tape in thin plastic film, with synthetic rubber adhesive, white color.
- Used especially in the application of carpet on the floors and in the auto industry.
- It adheres well to all substrates, such as tiles, ceramics, wood, metal, etc., Good tear resistance, easy detachment.
- CHARACTERISTICS:
- Adhesiveness' steel (PEEL) N / cm .: 7 +/- 1.
- Micron thickness: 145 +/- 5.
- Tensile strength N / cm .: 55 +/- 5.
- Elongation at break%: 600.
- Temperature resistance ° C -10 / + 60.

Code	Desc.	Height mm	Length m
4060700150	5019	19	25
4060700200	5025	50	25

6

Invisible adhesive tape acrylic double-sided transparent multipurpose



- Acrylic double-sided adhesive tape perfectly transparent high-performance, multi-purpose.
- Ideal for the invisible fixing of transparent parts in plastic PC-PMMA normal or glass, or in any condition where it is not possible to use a fastening of the mechanical type.
- Perfect for fixing the door mirror on the windscreen of the vehicle interior.
- Ideal in the automotive sector for the fixing of moldings and other details of finishing, fastening of interior panels. In the construction sector or plant it can be used for any fastening on glass, metal or wood.
- Before use, make sure the surfaces to be bonded are clean, dry and free of grease, oil, rust and dust.
- Roll size: height 25 mm., 0.5 mm thick. length 3 mt.

Code	Desc.	Dim. L.xH. Mm
4060700400	7025	3000x25

Tecnical Features	
Peeling su acciaio a 23°C	> 10 minutes
Lengthening at breaking	> 800%
Resistenza alla temperatura	-40/+150°C
Base	Acrylic adhesive on PE liner
Spessore adesivo	0,5 +/- 0,1 mm.
Color	Transparent

Double-sided foam tape to mirrors and vertical applications



- Double-sided tape in expanded polyethylene foam with acrylic adhesive emulsion.
- Suitable for all vertical applications, in particular of glass, mirrors, metals and plates.
- Excellent resistance to oils, plasticizers, solvents, UV rays and humidity '.
- CHARACTERISTICS:
- Density 'kg / m3: 100.
- Thicknesses to. + Media. microns PSTC 5: 850 +/- 150.
- Adhesiveness' steel N / cm AFERA 4001: 10 +/- 1.5.
- Temperature resistance ° C -10 / + 100.

Code	Desc.	Height mm	Length m
4060700300	6025	25	25

Self-adhesive tape anti-slip



- Black non-slip tape with acrylic adhesive high held.
- Very good friction coefficient.
- Silicone paper liner.
- Flexibility 'up to 90 °.
- Outdoor durability: over 2 years.
- Resistant to temperatures from -30 ° C to 110 ° C.
- It is commonly used on steps, stairs, floors of means of locomotion and transport, caravans, tractors, trucks, etc.

Code	Desc.	Measures
4460007800	4033	H25mmx18m
4460007850	4033/50	H50mmx18m

Paper tape for masking



- Lightly crepe paper adhesive tape.
- Masking industry powered vehicles.
- In particular this adhesive ensures ease of removal after use without the release of waste even when subjected for a period of time at a temperature up to 80 °.
- Is also used in painting and civil negl the graphic studies as removable tape.
- Being removed leaves no residue.

Code	Desc.	h mm	L mm
4060100100	10	19	50
4060300090	25	25	50
4060300100	38	38	50
4060500100	50	50	50

Paper tape for gaskets



- Special tape in paper with rib in plastic material suitable for the masking of the window seals during painting.
- Simple use, easy detachment and no release of mastic even if subjected to high temperatures for long periods.
- Rigid rib height 15mm.


Code	Desc.	h mm	L m
4060300300	40G	40	10

6

Transfer to friezes



- New system of double-sided adhesive fastening controlled transfer, for bonding friezes emblems and all the details that must be positioned before bonding definitive.
- It replaces normal tapes, peel the glue automatically transfers only on the contact details to be fixed. It shapes alone.
- Exceptionally resistant to weather and temperatures. The thermal resistance is from -30 ° C to + 180 ° C.
- Packaged in strips 50x300 mm dimensions.



Code	Desc.	Dim. mm	N. Pieces
4110011900	2705	50 x 300	10


Adhesive Velcro type telepass



- Adhesive fasteners, of the type used for fixing to the glass of the toll.
- The fastening system, in contrast to the normal scrotch Velcro, and 'based on the principle of closure of the teeth on themselves, and allows not to have a male part and a female. The adhesive and 'formed by a single part that sticks on itself in both longitudinal and transverse directions.
- The force that joins the two pieces of tape is very strong, it can 'be closed and reopened many times, and acrylic adhesive on the board allows adherence to surfaces.
- Easily cut to size, cost, the strong hold for each attachment that can be easily removed.

Code	Desc.	Length <i>m</i>
4720023160	2051	2

Technical Features	
Spessore mm	5,9 ca.
Forza di chiusura n/cm2	15-25
Adhesiveness N/cm2	25-35
Color	Transparent

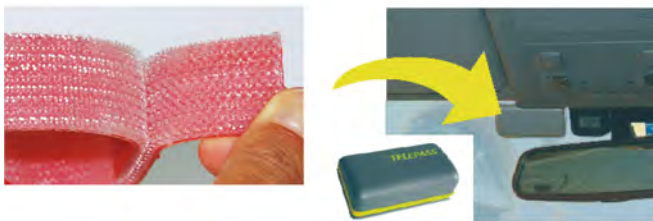

6

Adhesive shaped "dual lock" for Telepass



- Convenient adhesive stretch "Dual Lock" precut for installation in glass of Telepass, parts of the original that came with the device. Useful any time for any reason it should be replaced.
- Suitable for all centers windshield replacement, the car body, the body of transformation vehicles.
- Strong grip adhesive acrylic type, system-off for hooking-quick release device.

Code	Desc.
4060008350	41

Velcro male + female



- Colore bianco.
- Colore nero.
- Base adesiva.

Code	Desc.	Dimension <i>height x leng.</i>	Color
4720018796	789/1B	20mmx25m	White
4720018797	789/2B	25mmx25m	White
4720018798	789/3B	50mmx35m	White
4720018791	789/1N	20mmx25m	Black
4720018792	789/2N	25mmx25m	Black
4720018793	789/3N	50mmx35m	Black



Base adesiva



Tipo tenace

Pluriball - film packaging



- Polyethylene film with air bubbles.
- FEATURES AND ADVANTAGES: Suitable for the packaging of products that need protection from dirt, scratches and bumps during transport and storage.
- It ensures maximum protection to fragile, shiny surfaces and painted, semi-finished mechanical parts, etc ..
- Weight 70g / m2.

Code	Desc.	Height mt	Length <i>mt</i>
4440003400	15870	1,25	100
4440003410	15872	1	100
4440003450	15891	2	200

Stretch film for packaging



- Stretch film 100% recyclable. Disposed with domestic waste.
- Non-toxic product guaranteed.
- In low density polyethylene at 100% (LLDPE).
- Knob supplied separately
- Ideal for creating packaging, to wrap pallets, objects, artifacts.
- Benefits: 500% elongation.
- The white film and 'suitable for the protection of the goods by the ultraviolet rays.
- Black or white film to cover teasels merchandise.

Code	Description	H mm	Ø int. mm	Each weight coil Kg	Spessore micron	Color
4440001020	11040	500	50	2,6±5%	23	TRANSPARENT
4440003420	15880	500	50	2,2±5%	20	TRANSPARENT
4440003430	15885	500	50	2,4±5%	23	WHITE
4440003440	15890	500	50	2,4±5%	23	BLACK
4440001030	11050 - KNOB 2 PIECES FOR FILM H500	-	-	-	-	-

Stretch film multipurpose



- Stretch film 100% recyclable.
- Non-toxic product guaranteed.
- In low density polyethylene at 100% (LLDPE).
- Thickness 23 microns
- Roll 125x100 meters. - Tube int. ø 38 mm.
- Elongation 500%.
- Knob provided separately.



Code	Desc.	Type
4440001000	11020	STRETCH FILM
4440001010	11030	KNOB

Polypropylene strapping for manual use



- Polypropylene strapping for manual use
- Polypropylene strapping 100% to pack and wrap products and packages during transport.
- Intended for all customers who warehousing, storage and shipment of goods.
- Elastic recovery: 90-95%.
- Tolerance: +/- 5%.
- Elongation: 10-15%.
- Temperature range -20 to + 60 ° C.
- Supplied on a reel, inner diameter 392 mm.
- Black Colour.

Code	Desc.	Width mm	Thickness mm	Length m
4430055650	1390	12	0,6	2500
4430055655	1395	15	0,8	1500

6


Strapping manual universal



- Strapping tools for manual holding of a width of 12 to 15 mm.
- Cast aluminum construction with steel levers and mechanism completely.
- Minimum effort of draw, and weight of 3 kg.

Code	Desc.
4430055665	1405

Seals for strapping

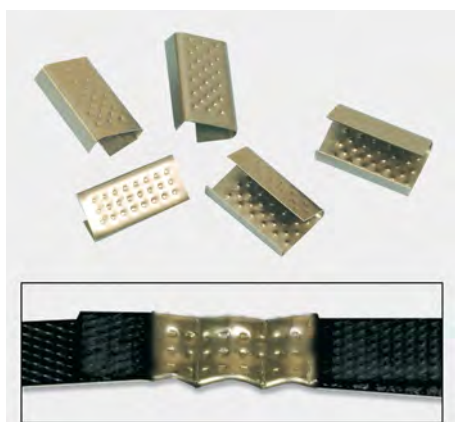

- Seals steel for closing the holding. Universal use with all models of strapping tools manuals.
- High clamping force and safety of the closure.

Code	Desc.	For straps width
4430055670	1410	12 mm
4430055675	1415	15 mm

Shopping reel for straps



- Carriage with disc locking plate.
- Construction in painted steel, with drawer seals.
- For reels with internal diameter 392 mm.

Code	Desc.
4430055660	1400

Bende per riparazioni di emergenza "Fasten&Fix"



- Benda in gomma neoprenica e velcro creata per risolvere situazioni d'emergenza senza la necessità di chiudere il passaggio dei fluidi tipo acqua, olio o similari dalle tubazioni rotte. La benda resiste a pressioni fino a 10 bar e temperature fino a 120°C.
- In caso di emergenza basta avvolgere strettamente la benda intorno alla rottura, fino alla fine del nastro fissando tutto con il velcro su se stessa. La tenuta è assicurata all'infinito e la benda, una volta fatta la riparazione, può essere riusata infinite volte.
- Indicata per chi lavora nel settore idrosanitario, ma anche elettrico, nell'edilizia, nel settore meccanico. La portata e la resistenza della benda gli permettono di essere usata anche per fissaggi e trasporto di materiale, come maniglia di emergenza, per fissaggio di carichi sfusi, per tenere insieme materiali durante le varie lavorazioni, ecc.
- Disponibili in quattro misure per tubazioni di diametro da 10 mm fino a 220 mm distinguibili fra loro dal diverso colore.



Code	Desc.	Color	Capacity mm
4060008400	42	Rosso	10 - 30
4060008410	43	Giallo	30 - 70
4060008420	44	Verde	70 - 160
4060008430	45	Bianco	160 - 220

