

Manual pump for oil



- Ideal for filling or topping up oil engine, gearbox and differential.
- Delivery capacity of 0.2 liters for pumped full.
- Equipped with hose 1.5 M and terminal curved.

Code	Desc.	Capacity Lt	Delivery x stroke
4430045595	597	16	LT 0,2

Rotary pump for oil



- Piston pump for oil, fuel oil and kerosene.
- Delivery: 50 l / min.
- Telescopic suction tube.
- Not suitable for aqueous / corrosive.

Code	Desc.
4430044950	523

Hand pump for oil and diesel



- Ideal for all types of oil and diesel fuel.
- Drum lt 50/200.
- Complete with bracket for attachment to the stem.
- Heavy pipe telescopic.
- Not suitable for aqueous / corrosive.

Code	Desc.	Delivery x stroke
4430049410	928	LT 0,5

Manual pump for antifreeze and washer



- Manual pump for dispensing liquids antifreeze, washer and all kinds of water-based product from metal drums of capacity 50 to 200 liters.
- Telescoping suction tube, threaded body for fixing on the hydraulic drums. Made entirely of metal with tube of metal and rubber hose with metal spout for dispensing.
- Pumping capacity: 0.5 liters per cycle.

Code	Desc.	Delivery x stroke
4430049430	930	0.5 liters / cycle

Spare Parts			
Accessories	Code	Desc.	
Adapter for plastic drums	4430049432	930/2	

Lever pump for transferring liquids



- Polypropylene pump (PP)
- Internal piston in AISI 316 stainless steel with Viton sealing gaskets
- Telescopic scavenging tube suitable for 50 kg to 200 kg cans
- Adjustment of the fulcrum of the pumping lever for low viscosity liquids such as water
- Thanks to its construction, it is ideal for transferring water, oil, diesel, alcohols, antifreeze, acetone and petrol

Code	Description
4430057418	1792.PG pompa a leva in PP

Tecnical Features	
Weight kg	1,2
Used with can or tank	50-200kg
Sealing gasket	Viton
Product outlet attachment	M3/4 bsp
Pump flow capacity	0,5l

Oiler portable



- Oiler heavy plate painted.
- Brass pump.
- Flexible tube.

Code	Desc.	Capacity gr.
4430034200	388-200	200
4430034210	388-300	300
4430034220	388-500	500

Syringe for oil.



- Rigid spout ø 8 mm.
- Brass body.

Code	Desc.	Capacity	L. tot.
4430044200	489	500	480 mm

Syringe for oil change / Differential



- Flexible spout.
- Steel body.

Code	Desc.	Capacity gr.	L. tot.
4430044860	515	500	590 mm

Hand pump double acting



- Pump multifunctional: for every pump sucks and ejects liquids such as oils and fuels.
- It allows to execute transfer operations without the use of containers or funnels.

Code	Desc.	Pouring capacity	L. tot.
4770001320	132	260 ML	600 mm

Complete kit for fat 25 kg



- Complete kit for fat content from 25 kg: 1 trolley for drums, one pump should 25kg, 1 triple junction, one drum cover diameter 310mm, 1 high pressure hose 3 m, 1 ns cod.4430047880 grease gun, 1 follower plate diameter 285mm, ns 4430049415 cod.
- We recommend the use of drums 24 kg and our cod.4110014840 4,110,016,595.
- Pneumatic pump for lubrication at high pressure using all kinds of fat.
- Indicated in the areas most prone to constant lubrication (car, mov. Land, industrial vehicles, etc.).

Code	Desc.	For buckets Kg
4430047890	867	25

Tecnical Features	
Air consumption	500 l /min
Massima gradazione	NLGI-2
Lunghezza asta pompante	480 mm
Pumping external diameter	30 mm
Grease outlet connection	3/8" M
Air inlet connection	1/4" F
Pressione max di uscita	480 bar
Portata	1800 gr /min.
Rapporto di compressione	65:1
pressione di utilizzo min./max.	5-8 bar

Spare Parts	
Code	Description
4430047892	867/P Pump grease Kg 25



Complete kit for fat to 50 Kg



- Complete kit for fat content from 50 kg: 1 trolley for drums, one pump should 50-60kg, 1 triple junction, one drum cover diameter 385mm, 1 high pressure hose 3 m, 1 ns cod.4430047880 grease gun, 1 follower plate diameter 370mm our code 4430049420.
- Pneumatic pump for lubrication at high pressure using all kinds of fat.
- Indicated in the areas most prone to constant lubrication (car, mov. Land, industrial vehicles, etc.).

Code	Desc.	For drums Kg
4430047875	864	50

Tecnical Features	
Air consumption	500 l /min.
Massima gradazione	NLGI-2
Lunghezza asta pompante	740 mm
Pumping external diameter	30 mm
Grease outlet connection	3/8" M
Air inlet connection	1/4" F
Pressione max di uscita	480 bar
Portata	1800 gr /min.
Rapporto di compressione	65:1
Pressione di utilizzo	5-8 bar

Spare Parts	
Code	Description
4430047876	864A Aerosolometer Kg.50

8

Aero-vacuum pump for 200 kg fat



- Pneumatic pump for the suction of fat, for 200 kg drums.
- Indicated in the automotive, industrial vehicles and earth moving.

Code	Desc.	Capacity (Kg)
4430045583	594/1	200

Tecnical Features	
Air consumption	500 l /min
Massima gradazione	NLGI-2
Lunghezza asta pompante	940 mm
Pumping external diameter	30 mm
Grease outlet connection	3/8" F
Air inlet connection	1/4" F
Portata	1800
Pressione max di uscita	480 bar
Pressione di utilizzo	5-8 bar
Rapporto di compressione	65:1

High pressure hose to pump should - fat



- Grease tube complete with fittings for connecting the pump should supply gun.

Code	Desc.	Length m	Press. Eserc. Bar	Attachment
4430049440	932/2	2	400	1/4M+1/4F
4430049442	932/6	6	400	1/4M+1/4F

Dispensing gun grease



- Gun with coupling head and greasing.

Code	Desc.	Attachment
4430047880	865	1/4 F

Manual pump grease



- Use loose grease.
- Complete with tube A.P. and head greasing.
- Capacity 16 Kg

Code	Desc.	Melted fat capacity
4430045395	580	16 Kg

Greaser compressed air



- Greaser used with grease cartridges 600 g. (our art. 411 00 411 00 03700 to 2622 and 14625 to 2737) and with loose grease up to 800 grams.
- Body diameter 60 mm.
- Length 500 mm.
- It can 'be powered with the air of the tractor truck.
- Complete with 2 cartridges lithium grease.

Code	Desc.	Operating press. BAR
4430033800	384	6 - 10

Grease gun



- Greaser used with grease cartridges 600 g. (n / s art. 411 00 411 00 14625 03700-2622 and 2737) and with loose grease up to 800 grams.
- Body diameter 60 mm.
- Length 460 mm.
- Accompanied by the first cartridge lithium grease.

Code	Desc.
4430044430	494



Manual grease gun 450 cm³ (400 g)



- Grease gun for the use of cartridges 400 g., Diameter 53 mm, or bulk grease.
- Stop rod with lever, knurled grip handles, high boost pressure.

Code	Desc.
4430053930	1083


Tube A.P. grease fitting



- Hose assemblies for greasers our art. 4430033800 to 384 / our art. 4430044430-494 and our art. 4430053930-1083

Code	Desc.	Length cm
4430033805	384/50	50
4430033810	384/100	100
4430033811	384/150	150

Heads for grease

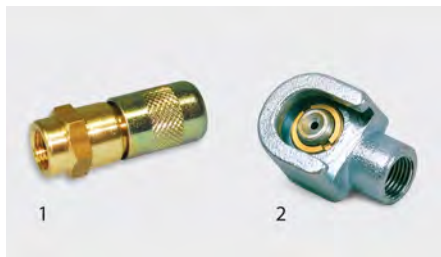

- Grease fitting standards.
- Grease fitting hexagon.

Code	Desc.	For lubricator type	Photo
4070002200	1420	ROUND	1
4070002300	1430	HEXAGONAL	2

Greasers



Code	Desc. Diam. X passo x type
4070000100	6 x 1 - H1P
4070000200	6 x 1 - H1L
4070000300	6 x 1 - H 1
4070000400	8 x 1 - H 1
4070000500	8x1,25 - H 1
4070000600	1 0 x 1 - H 1
4070000700	10x1,25 - H 1
4070000800	10x1,5 - H 1
4070000850	1/4 GAS - H 1
4070000900	6 x 1 - H 2
4070001000	8 x 1 - H 2
4070001100	8x1,25 - H 2
4070001200	1 0 x 1 - H 2
4070001300	10x1,25 - H 2
4070001400	10x1,5 - H 2
4070001500	6 x 1 - H 3
4070001600	8 x 1 - H 3
4070001700	8x1,25 - H 3
4070001800	1 0 x 1 - H 3
4070001900	10x1,25 - H 3
4070002000	10x1,5 - H 3

Assortment greasers



- Contents: 17 measures of grease from diam. 6 in diam. 10, H1 + H2 + H3 + n ° 2 heads with 4 jaws.
- Total 172 pieces.
- Supplied in a plastic carrying case n / s cod. 398 00 01800 201.

Contenuto kit

CODICE	DESCRIZIONE	Q.tà
4070000100	6X1-H1P INGRASSATORE	10
4070000300	6X1-H1 INGRASSATORE	10
4070000400	8X1-H1 INGRASSATORE	10
4070000500	8X1.25-H1 INGRASSATORE	10
4070000600	10X1-H1 INGRASSATORE	10
4070000700	10X1.25-H1 INGRASSATORE	10
4070000800	10X1.5-H1 INGRASSATORE	10
4070000900	6X1-H2 INGRASSATORE	10
4070001100	8X1.25-H2 INGRASSATORE	10
4070001200	10X1-H2 INGRASSATORE	10
4070001300	10X1.25-H2 INGRASSATORE	10
4070001400	10X1.5-H2 INGRASSATORE	10
4070001500	6X1-H3 INGRASSATORE	10
4070001700	8X1.25-H3 INGRASSATORE	10
4070001800	10X1-H3 INGRASSATORE	10
4070001900	10X1.25-H3 INGRASSATORE	10
4070002000	10X1.5-H3 INGRASSATORE	10
4070002200	1420 TESTINA INGRAS. 4 GRIFFE	2

Code	Desc.
4070100100	18



Aero vacuum pump oil 200 kg



- Pneumatic pump for suction of oil and waste oil.
- To 200 kg drums.
- Indicated in the automotive, industrial vehicles and earth moving.

Code	Desc.
4430045580	594

Tecnical Features	
Air consumption	110
Massima gradazione	SAE 150
Lunghezza asta pompante	940 mm
Pumping external diameter	42 mm
Oil outlet connection	1/2" M
Air inlet connection	1/4" F
Portata	16L/min
Pressione max di uscita	480 bar
Pressione di utilizzo	5-8 bar
Rapporto di compressione	3:1

High pressure hose to pump should - Oil



- Hose for oil complete with fittings.
- For connection to the pump should supply gun M + F 1/2.

Code	Desc.	Length m	Press. Eserc. Bar	Attachment
4430045590	596/2	2	30	1/2M+F
4430045592	596/5	5	30	1/2M+F

8

Dispensing gun for oil



- Grease gun oil with beak bent.

Code	Desc.	Attachment
4430045585	595	1/2" F

Nozzle meter for oil



- With digital counter.
- Maximum accuracy and reliability.
- Reading on the LCD, immediately and without errors.
- Partial zeroing.
- With drip spout.

Code	Desc.	Attachment
4430049405	927	1/2" F

Inertia reel for oil



- Fed from a pump should.
- With specific pipe for the passage of oil.
- Supplied with pump nozzle and bracket.
- For wall mounting.

Code	Desc.	Length <i>m</i>	Attachment
4430049395	925	15	3/8" F


Adblue kit with manual pistol



- Kit with tube and manual pistol per dispensing Adblue by gravity
- Suitable for 1,000 litre can holder
- 3/4" Epdm tube, length 5 m
- 3/4" bps-F tube attachment

Code	Description
4430057412	1770.URC9 KIT ADBLUE

Stainless steel bracket for pistol

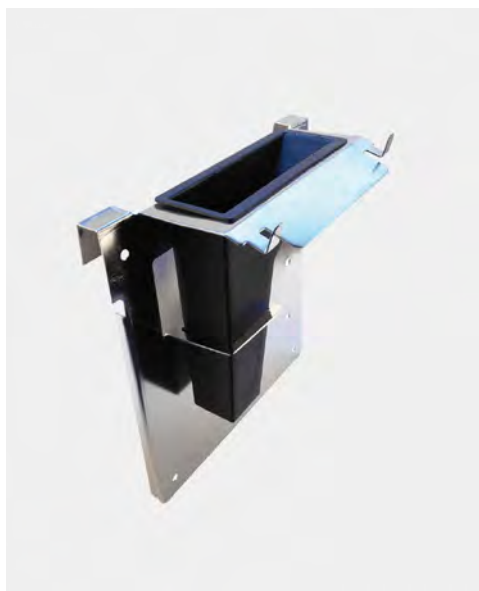

- Stainless steel bracket attachments for can holder
- Permits housing the dispenser pistol P { margin-bottom: 0.21cm; }

Code	Description
4430057414	Staffa inox per pistola

ADBLUE kit for can holders of 1,000 litres.



- Dispenser kit with 230V electric pump
- for can holders of 1,000 litres
- with dispenser pistol
- Complete with stainless steel bracket (4430057414)
- The can holder is not included in the kit

Code	Description
4430057408	1770.URA9

Digital litre counter pistol for Adblue



- Litre counter pistol with double outlet
- Permits utilisation in the car sector and the industrial vehicle sector
- 15 mm diameter outlet for cars and 19 mm diameter outlet for lorries
- with clip to attach the trigger
- Not suitable for use in installations that operate by gravity.

Code	Description
4430057413	1767.UR21 Pistola contalitri digitale adblue

Tecnical Features	
Minimum operating pressure	3bar
Operating temperature	-10°+60°
Input	3/4 bps-F
Supply	5-35 litres/min

Adblue manual dispenser pistol



- **Manual pistol for cars and lorries**
- 15mm outlet with fixed outlet
- For cars and lorries thanks to the flow capacity of 80 litres per minute
- In polypropylene
- With pin to block the trigger

Code	Description
4430057410	1767.UR41 Pistola manuale adblue

Tecnical Features	
Peso Kg	0,26
Operating temperature	-10°+60°
Input	3/4 bps-F
Supply	80 litres/min

Adblue rotary pump



- Polypropylene pump
- Suitable for the distribution of oil, diesel and Adblue in drums up to 200 litres
- Dispensing capacity: up to 60 litres/min
- With fixing union for stainless steel drums

Code	Description
4430057411	1792.PRP6 POMPA ROTATIVA ADBLUE

ADBLUE KIT pump with digital pistol for drums of 200 litres



- Complete with stainless steel bracket for plastic drums of 200 litres
- With 230V electric pump
- Supply capacity: 30L/Min
- For cars
- The drum is not included in the kit
- For moving drums of 200 kgs, refer to Trolley for drums, our art. nr. 4700001700

Code	Description
4430057404	1770 URB4

