


Scheda tecnica **Raccordi a pressare ORSF dritti femmina**

19/02/2025

Pagina 1 di 1

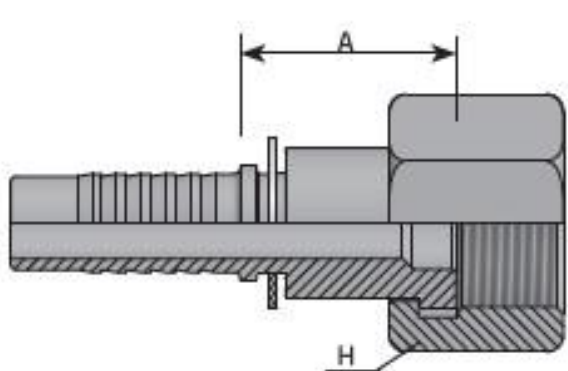

- Raccordo ORSF (O-ring Face Seal) incorporano un O-ring sulla parte anteriore del raccordo. Realizzato secondo lo standard SAE J1453.

CODICE	LATO TUBO		LATO PARTE FILETTATA		DIMENSIONI		PRESSIONE	
			T	t/1"	H	A		
	inch	mm	Inch		mm	mm	Bar	Psi
5190007000	1/4"	6,4	9/16"	18	17	20,5	450	6526
5190007015	5/16"	7,9	11/16"	16	22	23	350	5076
5190007030	3/8"	9,5	11/16"	16	22	23,5	445	6454
5190007040	3/8"	9,5	13/16"	16	24	26	445	6454
5190007050	1/2"	12,8	11/16"	16	22	29	415	6019
5190007070	1/2"	12,8	1"	14	30	30	415	6019
5190007110	3/4"	19	1,3/16"	12	36	33	350	5076
5190007120	3/4"	19	1,7/16"	12	41	34	350	5076
5190007140	1"	25,4	1,7/16"	12	41	35	280	4061