


Scheda tecnica **Raccordi a pressare ORSF dritti maschio**

19/02/2025

Pagina 1 di 1

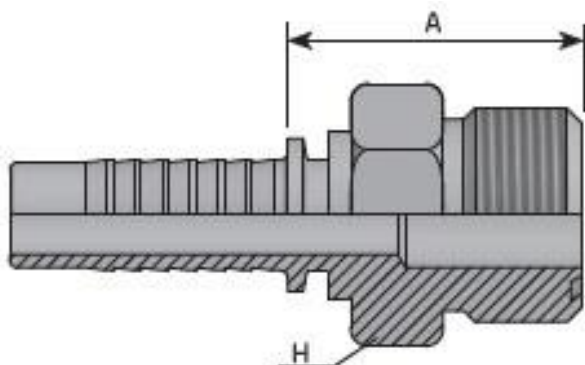

- Raccordo ORSF (O-ring Face Seal) incorporano un O-ring sulla parte anteriore del raccordo. Realizzato secondo lo standard SAE J1453.

CODICE	LATO TUBO		LATO PARTE FILETTATA		DIMENSIONI		PRESSIONE	
	inch	mm	T Inch	t/1"	H mm	A mm	Bar	Psi
5190007180	1/4"	6,4	9/16"	18	17	24	450	6526
5190007200	5/16"	7,9	11/16"	16	19	27,5	350	5076
5190007210	3/8"	9,5	11/16"	16	19	27,5	445	6454
5190007220	3/8"	9,5	13/16"	16	22	30,5	445	6454
5190007240	1/2"	12,8	13/16"	16	27	34	415	6019
5190007250	1/2"	12,8	1"	14	27	31,5	415	6019
5190007260	1/2"	12,8	1,3/16"	16	32	36	415	6019
5190007290	3/4"	19	1,3/16"	12	32	38	350	5076
5190007300	3/4"	19	1,7/16"	12	41	38,5	350	5076
5190007310	1"	25,4	1,7/16"	12	41	39,5	280	4061